## This Page Is Inserted by IFW Operations and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**


Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):


- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

## IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problem Mailbox.

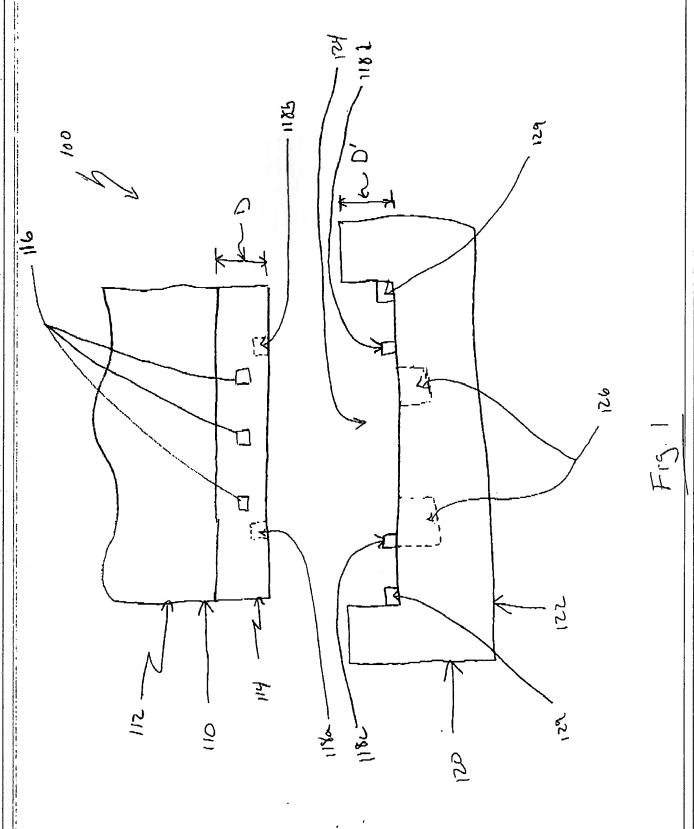

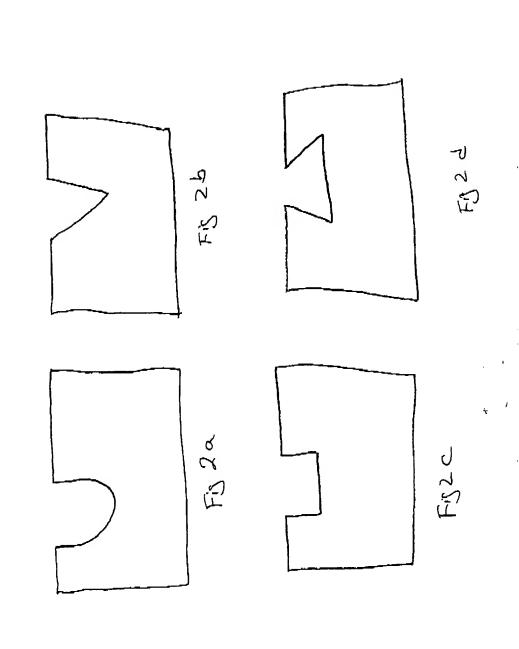

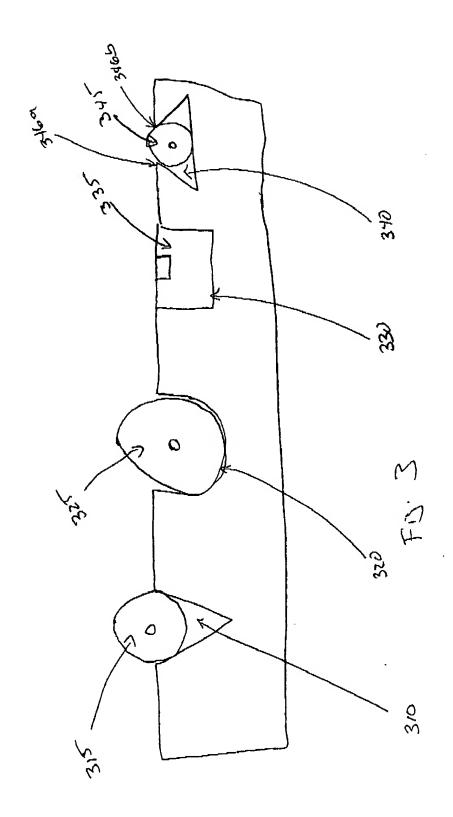



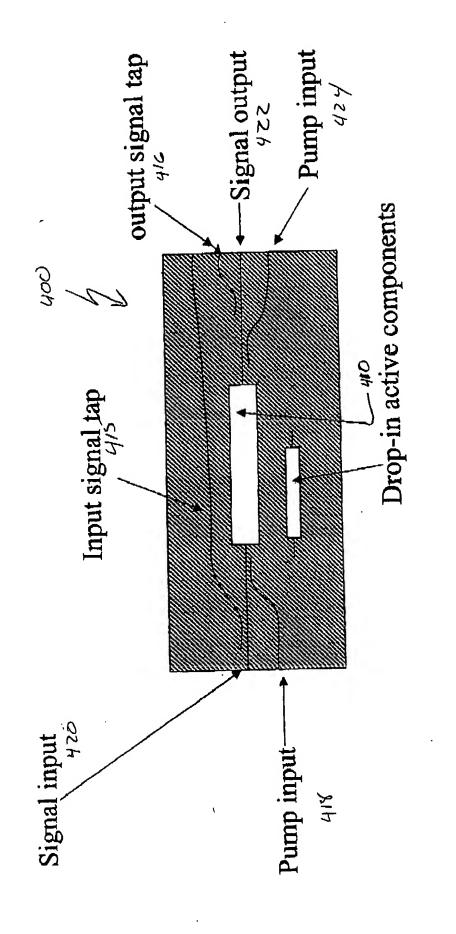


Figure 304

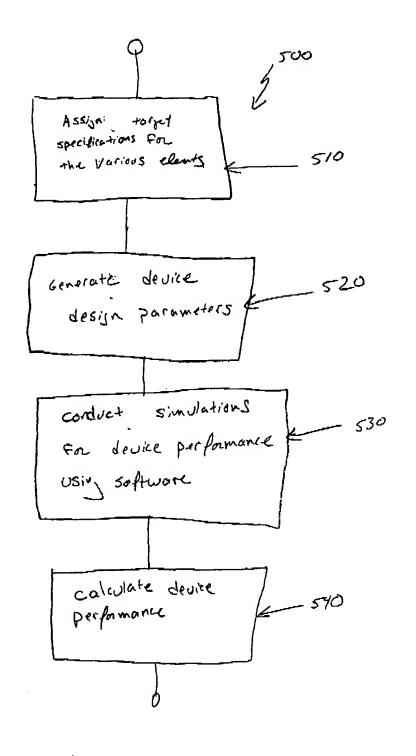

F13. 5

F13.6 600 assigning viable toleranes for the unious devices Sprinate performance Sensativities par the 620 tolerance values select an adjustment parameter calculate overall component and error K proper adjust the performance Sensativities hosed on Component and error 650 6 udjet

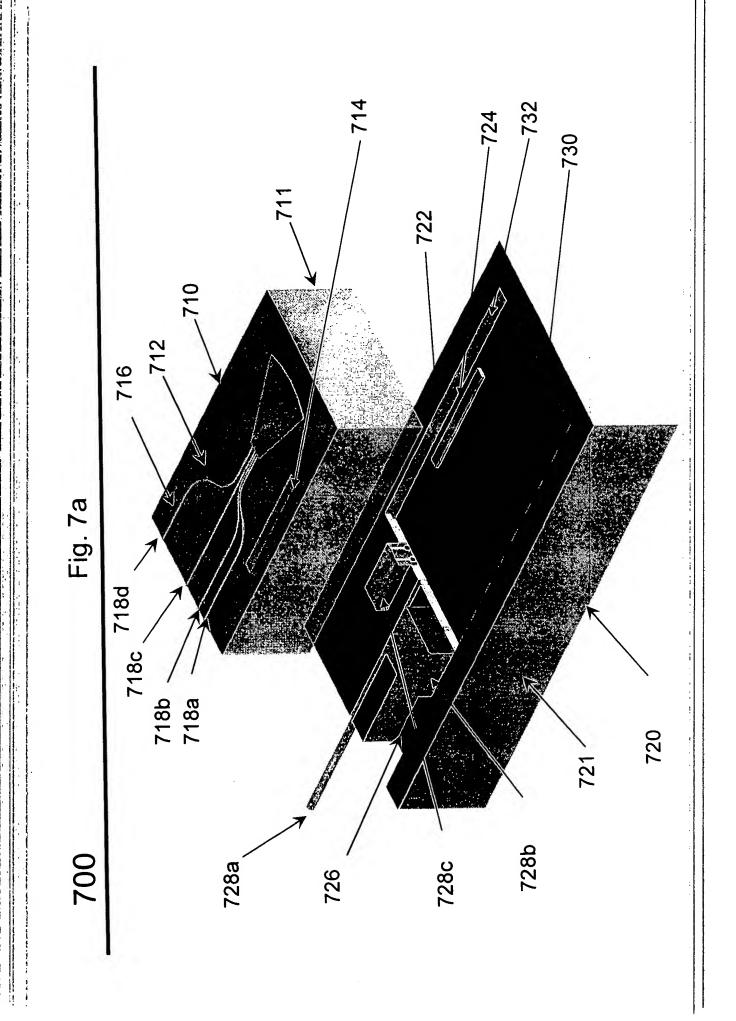

710 718c \_718b ,728c Fig. 7b 718c 718d

